




Reg. Nr. 14403-02

FBM<sup>®</sup>  
FBM<sup>®</sup>  
FBM<sup>®</sup>  
FBM<sup>®</sup>

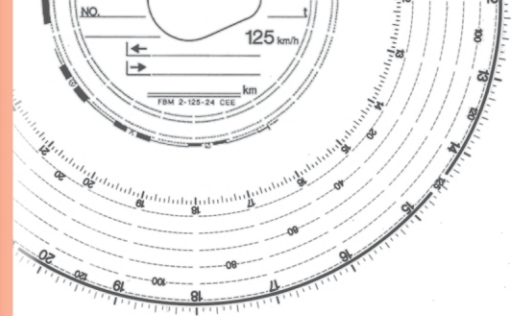

# TACHOROLL<sup>®</sup>

*Type-approved thermal paper for Siemens VDO, Actia and Stoneridge digital tachographs*

**QUALITY RECORDING**

**SECURE CONSERVATION of DATA**



**Digital  
tachograph  
thermal-paper tally  
rolls conforming  
with EC Regulations  
2135/1998 and  
1360/2002**



**Special thermal paper  
resistant to chemicals, sunlight /UV-light,  
moisture and high and low  
temperatures!**

# TACHOROLL®




**Printouts are legal documents and must be treated as such.**

Thermal paper for use by the new digital tachograph must bear the relevant type-approval mark and specify the type(s) of recording equipment with which it may be used.



**TACHOROLL®** is designed and approved for use in Siemens VDO, Actia and Stoneridge digital tachographs.

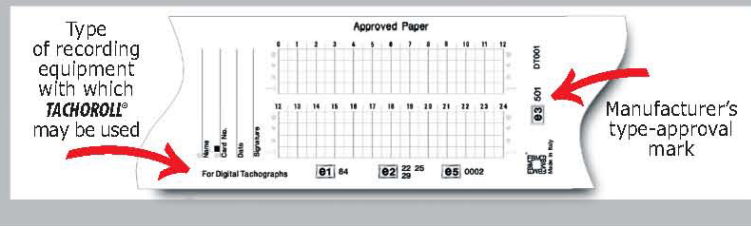

**TACHOROLL® is made of special thermal paper specifically designed for use in digital tachographs ...**

... bear this in mind when buying your rolls!

Don't confuse **TACHOROLL®** with standard thermal paper.

**TACHOROLL®**  
Temperature resistant

**TACHOROLL®**  
Sunlight / UV-light resistant

**TACHOROLL®**  
Chemical resistant

**TACHOROLL®**  
Moisture resistant

COMPARATIVE TESTS	TACHOROLL®	STANDARD THERMAL PAPER
TEMPERATURE 90°C for 4 hours		
CAPPUCCINO 23°C for 10 minutes		
WATER 23°C for 15 hours		
FUEL 23°C for 5 hours		
ENGINE OIL 40°C for 15 hours		
PVC FOLDER 40°C for 7 days		

